
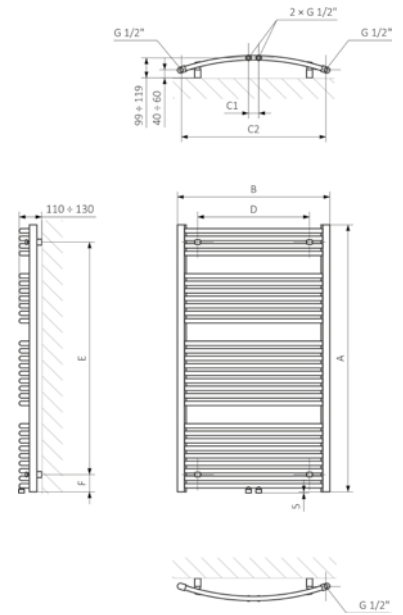


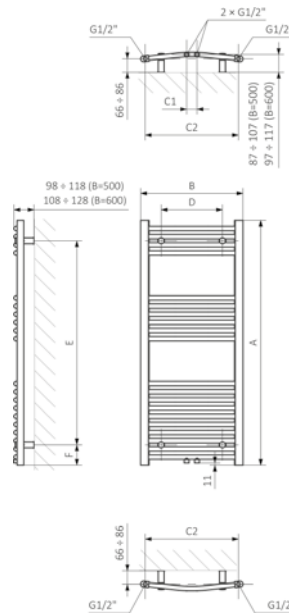

für: 800 x 500 mm, 800 x 600 mm,
1.200 x 500 mm, 1.200 x 600 mm,
1.600 x 500 mm, 1.600 x 600 mm,
1.800 x 500 mm, 1.800 x 600 mm

für: 1.200 x 750 mm, 1.600 x 750 mm,
1.800 x 750 mm

Art.-Nr.	Höhe	Breite	Tiefe	Nabenab- stand	Betriebs- druck	Horizontaler Abstand der Wandhalterungen D	Vertikaler Abstand der Wandhalterungen E	Position der unteren Wandhalterung F	Kapazität	Gewicht
	A	B	G	C2						
10739151	800 mm	500 mm	30 mm	455 mm	800 kPa	300 mm	600 mm	100 mm	3,41 dm³	4,81 kg
10739153	800 mm	600 mm	30 mm	555 mm	800 kPa	400 mm	600 mm	100 mm	3,86 dm³	5,51 kg
10739155	1.200 mm	500 mm	30 mm	455 mm	800 kPa	300 mm	1.000 mm	100 mm	4,98 dm³	6,98 kg
10739157	1.200 mm	600 mm	30 mm	555 mm	800 kPa	400 mm	1.000 mm	100 mm	5,62 dm³	7,97 kg
10739159	1.200 mm	750 mm	30 mm	705 mm	800 kPa	550 mm	1.000 mm	100 mm	5,62 dm³	7,97 kg
10739161	1.600 mm	500 mm	30 mm	455 mm	800 kPa	300 mm	1.400 mm	100 mm	6,55 dm³	9,15 kg
10739163	1.600 mm	600 mm	30 mm	555 mm	800 kPa	400 mm	1.400 mm	100 mm	7,39 dm³	10,44 kg
10739165	1.600 mm	750 mm	30 mm	705 mm	800 kPa	550 mm	1.400 mm	100 mm	7,39 dm³	10,44 kg
10731967	1.800 mm	500 mm	30 mm	455 mm	800 kPa	300 mm	1.600 mm	100 mm	7,47 dm³	10,44 kg
10731969	1.800 mm	600 mm	30 mm	555 mm	800 kPa	400 mm	1.600 mm	100 mm	8,44 dm³	11,92 kg
10731971	1.800 mm	750 mm	30 mm	705 mm	800 kPa	550 mm	1.600 mm	100 mm	8,44 dm³	11,92 kg